

GLX Transparency Viewers



The Exceptional D5000 Viewers



These sleek, smartly-styled viewers provide strict compliance with the graphic arts and photographic D5000 Standard and produce an actual system CRI approaching 95!

Graphicalite® GLX Viewers are precision engineered, easy to use and styled to complement any working environment. The GLX Series feature: full-spectrum Graphicalite 100 Color Viewing Lamps, superior color quality, special non-glare Plexiglas®, unexcelled viewer to viewer consistency and a high-efficiency reflector system which creates uniform luminance, eliminating shadows and "hot-spots." All GLX Viewers are designed with Munsell Gray surfaces providing neutral viewing fields.

The ergonomic design permits fast and easy relamping, and includes the distinctive *chrome grip*, a convenient transparency holder. In addition to easy wall-mounting, all GLX Viewers have an adjustable stand which offers varied viewing angles, allowing the viewers to lay flat, stand vertically, or incline at approximately 15 or 75 degrees. An integrated handle affords easy portability. (GLX Series Viewers are available in four model sizes. All models can be ordered with or without LiteGuard.)

Built-in Quality Control

The Graphicalite GLX-LG Series (GLX Viewers with LiteGuard) are the *only* transparency viewers to offer the unique LiteGuard "intelligence" system. A critical quality control monitor, LiteGuard features an exclusive digital circuitry design. LiteGuard emits a dynamic visual signal when the viewer:

- requires relamping
- has warmed-up and stabilized
- reaches 25%, 50% and 100% of the lamp's critical color life
- experiences a significant voltage drop



Tested and Approved

All GLX Viewers proudly bear this important quality control seal.



GTI's official seal of approval guarantees that every Graphicalite GLX Viewer meets GTI's specifications - the toughest quality control tolerances in the industry today. A highly trained GTI technician tests every viewer for strict adherence to ANSI and ISO Standards *and* measures each individual viewer both colorimetrically and photometrically.

* All Viewers shown in the above photograph are GLX-LG models.


COLOR VIEWING SYSTEMS

Graphicalite®

Graphiclite GLX Viewers - Outstanding Light Quality And Unprecedented Advances in Viewer Engineering And Design.

Every feature of the GLX Viewer is designed to enhance critical color viewing. Strict color quality control and versatility of viewer application, make GLX Viewers the first choice in D5000 transparency viewing systems.

Highlighted below are the individual product features which provide: Standard viewing conditions, ease of portability, varied viewing angles and mounting possibilities, console options and simple maintenance.

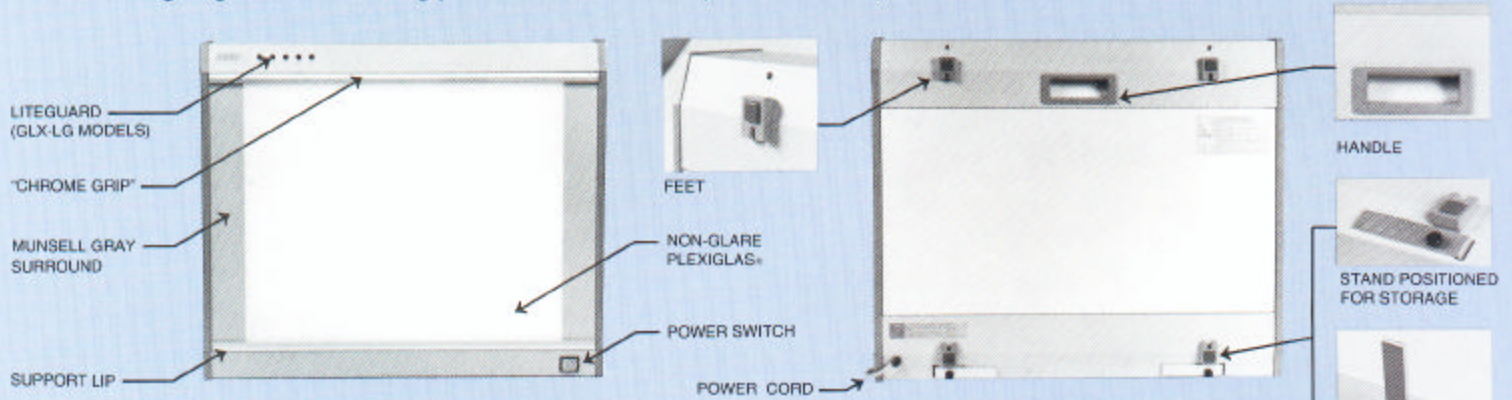


For editing, selecting and multi-image applications, GLX models are available as console units. Models GCX-1 and GTX-1 are comparable in size to the GLX-44; Models GCX-2 and GTX-2 are comparable in size to the GLX-20. Also available as tabletop units, Models GHX-1 & GHX-2.

Unique stand design and storage option permit viewer to lay flat or incline at approximately 15 or 75 degrees.



Units can be wall-mounted in two positions.

And...simple maintenance is a "snap" when it is time to relamp! Scheduled relamping with Graphiclite 100 bulbs insures D5000 compliance.

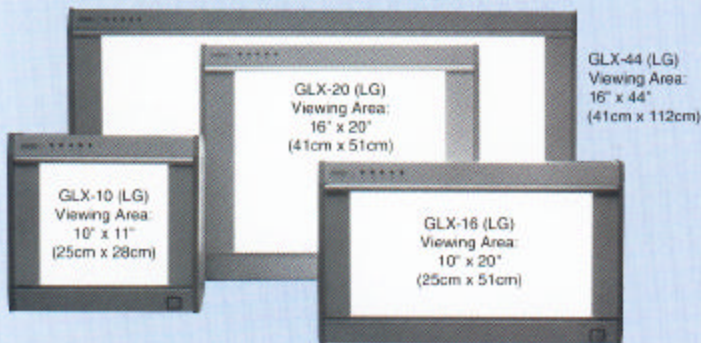

GLX-44 (LG)
Viewing Area:
16" x 44"
(41cm x 112cm)

GLX-20 (LG)
Viewing Area:
16" x 20"
(41cm x 51cm)

GLX-10 (LG)
Viewing Area:
10" x 11"
(25cm x 28cm)

GLX-16 (LG)
Viewing Area:
10" x 20"
(25cm x 51cm)

Specifications

| Model | Dimensions (HxWxD) | Electrical 120V/60Hz* | Weight* | |
|-----------------------|---|-------------------------------------|----------------------|----------------------|
| | | | Net Approximate | Shipping |
| GLX-10LG: (GLX-10) | 15" x 16" x 5" (38cm x 41cm x 13cm) | 96 watts | 14 lbs 6.4 kilos | 17 lbs 7.7 kilos |
| GLX-16LG: (GLX-16) | 15" x 25" x 5" (38cm x 64cm x 13cm) | 60 watts | 20 lbs 9.0 kilos | 24 lbs 10.9 kilos |
| GLX-20LG: (GLX-20) | 21" x 25" x 5" (53cm x 64cm x 13cm) | 72 watts | 24 lbs 10.9 kilos | 29 lbs 13.2 kilos |
| GLX-44LG: (GLX-44) | 21" x 49" x 5" (53cm x 124cm x 13cm) | 140 watts *230V/50Hz per request | 43 lbs 19.5 kilos | 52 lbs 23.6 kilos |

FOR COLOR VIEWING COMMUNICATION AT ITS VERY BEST, CALL OR WRITE TODAY:

gti *gti graphic technology, inc.*
211 DUPONT AVENUE • P.O. BOX 3138 • NEWBURGH, N.Y. 12550
TELEPHONE: (914) 562-7066 FAX: (914) 562-2543

GTI manufactures and designs a complete line of Graphiclite D5000 color viewing products. GTI also offers consultative lighting surveys and maintenance contracts. Contact GTI or your equipment dealer for further information.





The Right Control...LiteGuard II

Color output and intensity of fluorescent lamps change over time. The LiteGuard II tells when the viewing system is ready to use, the lamp hours used, and the lamp hours remaining before replacement. It even provides fax, phone, & e-mail information to order replacement lamps!



GLX TRANSPARENCY VIEWERS

| Model | Description | Relamp Kit Model |
|-----------------|--|-------------------------|
| GLX-10 | 10" x 10" (25 cm x 25 cm) viewing area | L211 |
| GLX-16 | 10" x 18" (25 cm x 46 cm) viewing area | L217 |
| GLX-20 | 16" x 18" (41 cm x 46 cm) viewing area | L317 |
| GLX-30 | 16" x 30" (41 cm x 76 cm) viewing area | L325 |
| GLX-44 | 16" x 42" (41 cm x 107 cm) viewing area | L332 |
| GLX-3044 | 30" x 42" (76 cm x 107 cm) viewing area | L632 |
| GLX-3856 | 38" x 56" (96 cm x 142 cm) viewing area | L740/T8 |
| GLX-4856 | 48" x 56" (122 cm x 142 cm) viewing area | L940/T8 |

Note: LiteGuard II may be added to all GLX transparency viewers for an additional cost. Please specify by adding "LG" after the model number. For example – model GLX-10LG. KT Installation kits suggested for build-in use of GLX-20 & GLX-44 in CVX & EVS units. Contact GTI for pricing details.